



GASOLINE INVERTER SILENT GENERATOR SET - 2.5KW

EG 3150/iGS



GENERATOR SET

Rated power	2.5 KW
Rated voltage	230 V
Rated current	10.9 AMPS
Frequency	50 Hz
Speed	3600 rpm

GENERATOR

Number of phases	One
Starting type	Recoil
Power factor	1.0
Fuel consumption	1.4 L/hr at 75% load
Fuel tank capacity	6 L

ENGINE

Engine model	H120i
Structure type	Single cylinder, in-lined, 4 stroke, air cooled, direct-injected
Bore x stroke	60.0 x 43.0
Displacement	120 cc
Compression ratio	9.5 : 1
Rated power	3.0 KWm
Oil model	SE 10W-30
Ignition system	Full transistor


GENSET

Sound level	70 dBA at 7m
Weight	20.5 Kg
Dimensions	500x295x490 mm



GASOLINE INVERTER SILENT GENERATOR SET - 2.5KW

EG 3150/iGS

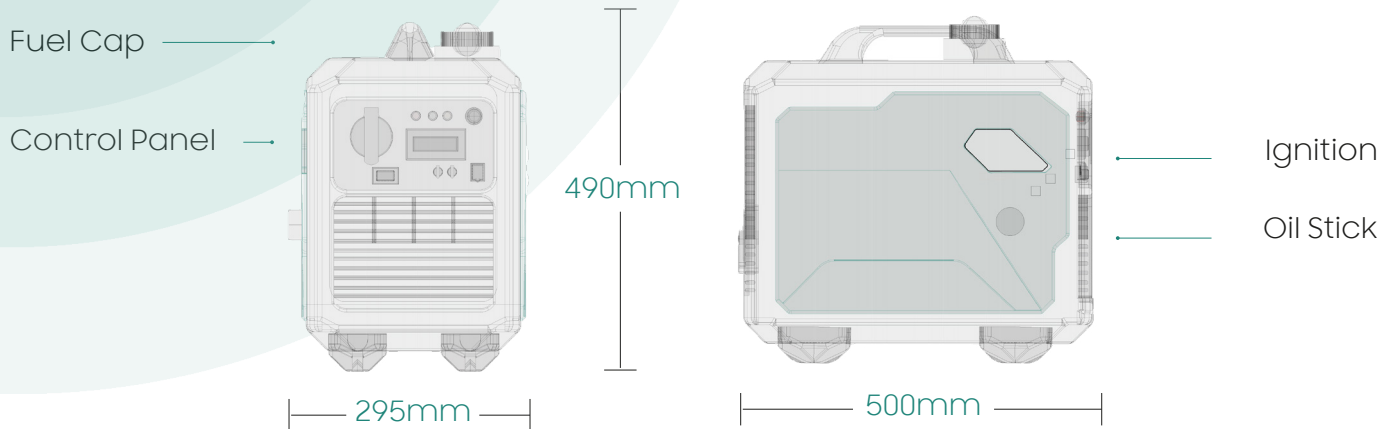

This Gasoline Inverter Silent Generator has a high end electronic upgrade. Delivering the latest technology, the inverter generator is an economy saver when it comes to fuel consumption and operates silently making it suitable for use in any outdoor environment. With low maintenance and a compact design, the EG 3150/iGS delivers sufficient power to meet your needs.

