



## GASOLINE INVERTER SILENT GENERATOR SET - 3.5KW

**EG 4500/iGS-RS**



### GENERATOR SET

Rated power	3.5 KW
Rated voltage	230 V
Rated current	15.2 AMPS
Frequency	50 Hz
Speed	3600 rpm

### GENERATOR

Number of phases	One
Starting type	Recoil + Remote Start
Power factor	1.0
Fuel consumption	2.1 L/hr at 75% load
Fuel tank capacity	12 L

### ENGINE


Engine model	H225i
Structure type	Single cylinder, in-lined, 4 stroke, air cooled, direct-injected
Bore x stroke	60.0 x 43.0
Displacement	223 cc
Compression ratio	9.5 :1
Rated power	4.0 KWm
Oil model	SE 10W-30
Ignition system	Full transistor

### GENSET

Sound level	70 dBA at 7m
Weight	40.0 Kg
Dimensions	595x440x515 mm



## GASOLINE INVERTER SILENT GENERATOR SET - 3.5KW EG 4500/iGS-RS

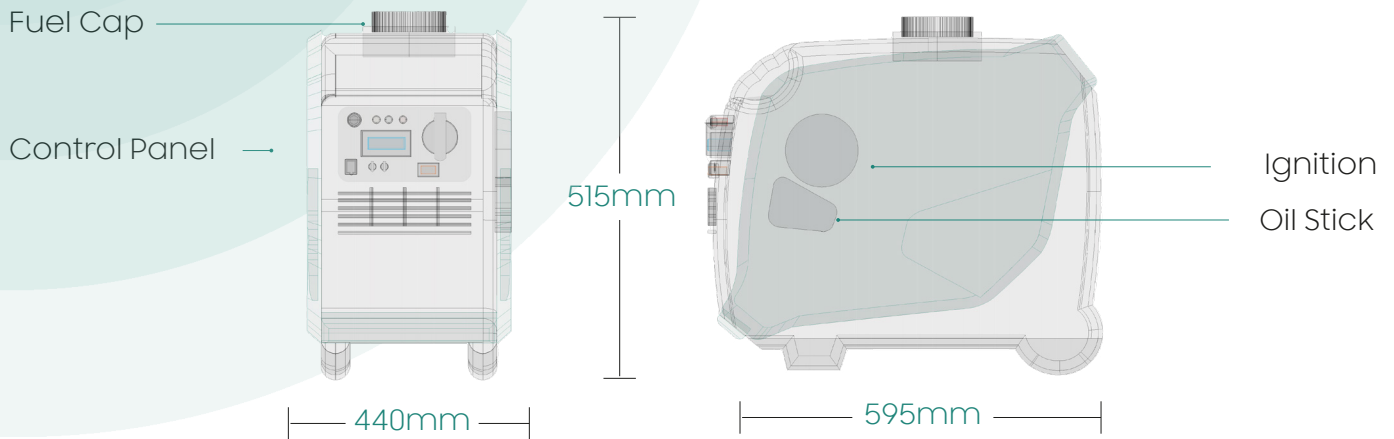

This Gasoline Inverter Silent Generator has a high end electronic upgrade. Delivering the latest technology, the inverter generator is an economy saver when it comes to fuel consumption and operates silently making it suitable for use in any outdoor environment. With low maintenance and a compact design, the EG 4500/iGS-RS with its remote start feature delivers sufficient power to meet your needs.

