



GASOLINE INVERTER SILENT GENERATOR SET - 5.0KW

EG 6250/iGS-RS



GENERATOR SET

Rated power	5.0 KW
Rated voltage	230 V
Rated current	21.7 AMPS
Frequency	50 Hz
Speed	4800 rpm

GENERATOR

Number of phases	One
Starting type	Recoil + Remote Start
Power factor	1.0
Fuel consumption	2.5 L/hr at 75% load
Fuel tank capacity	13 L

ENGINE

Engine model	H225i-3
Structure type	Single cylinder, 4 stroke, air cooled, cylinder center inclined 55°
Bore x stroke	60.0 x 43.0
Displacement	223 cc
Compression ratio	9.5 :1
Rated power	5.5 KWm
Oil model	SAE SJ 10W-40
Ignition system	Full transistor


GENSET

Sound level	71 dBA at 7m
Weight	43.0 Kg
Dimensions	590x390x545 mm



GASOLINE INVERTER SILENT GENERATOR SET - 5.0KW

EG 6250/iGS-RS

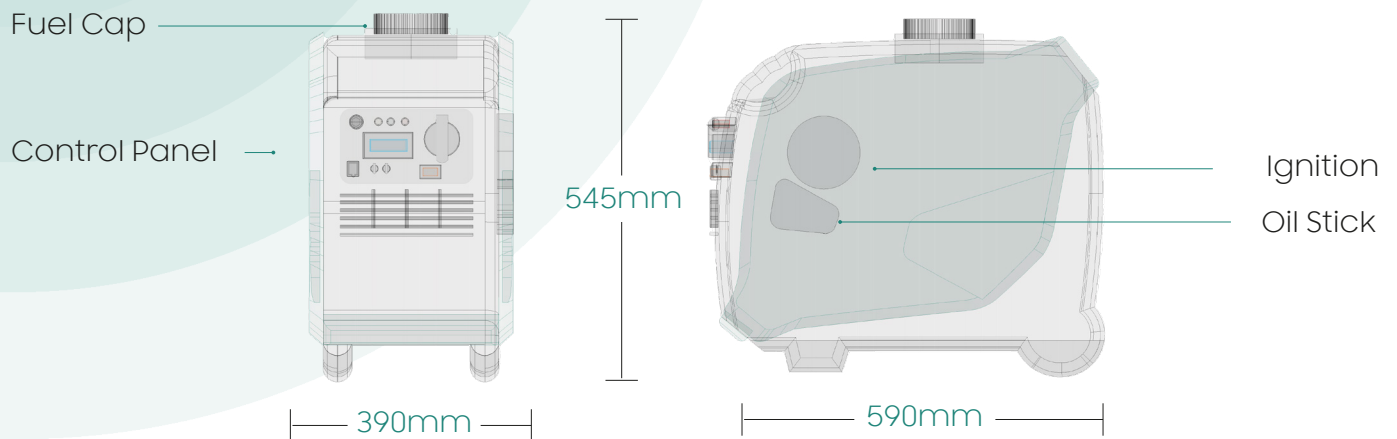

This Gasoline Inverter Silent Generator has a high end electronic upgrade. Delivering the latest technology, the inverter generator is an economy saver when it comes to fuel consumption and operates silently making it suitable for use in any outdoor environment. With low maintenance and a compact design, the EG 6250/iGS-RS with its remote start feature delivers sufficient power to meet your needs.

